


## SAP C\_FIORDEV\_22 Dumps Questions [2023 Pass for C\_FIORDEV\_22 Exam [Q25-Q47]

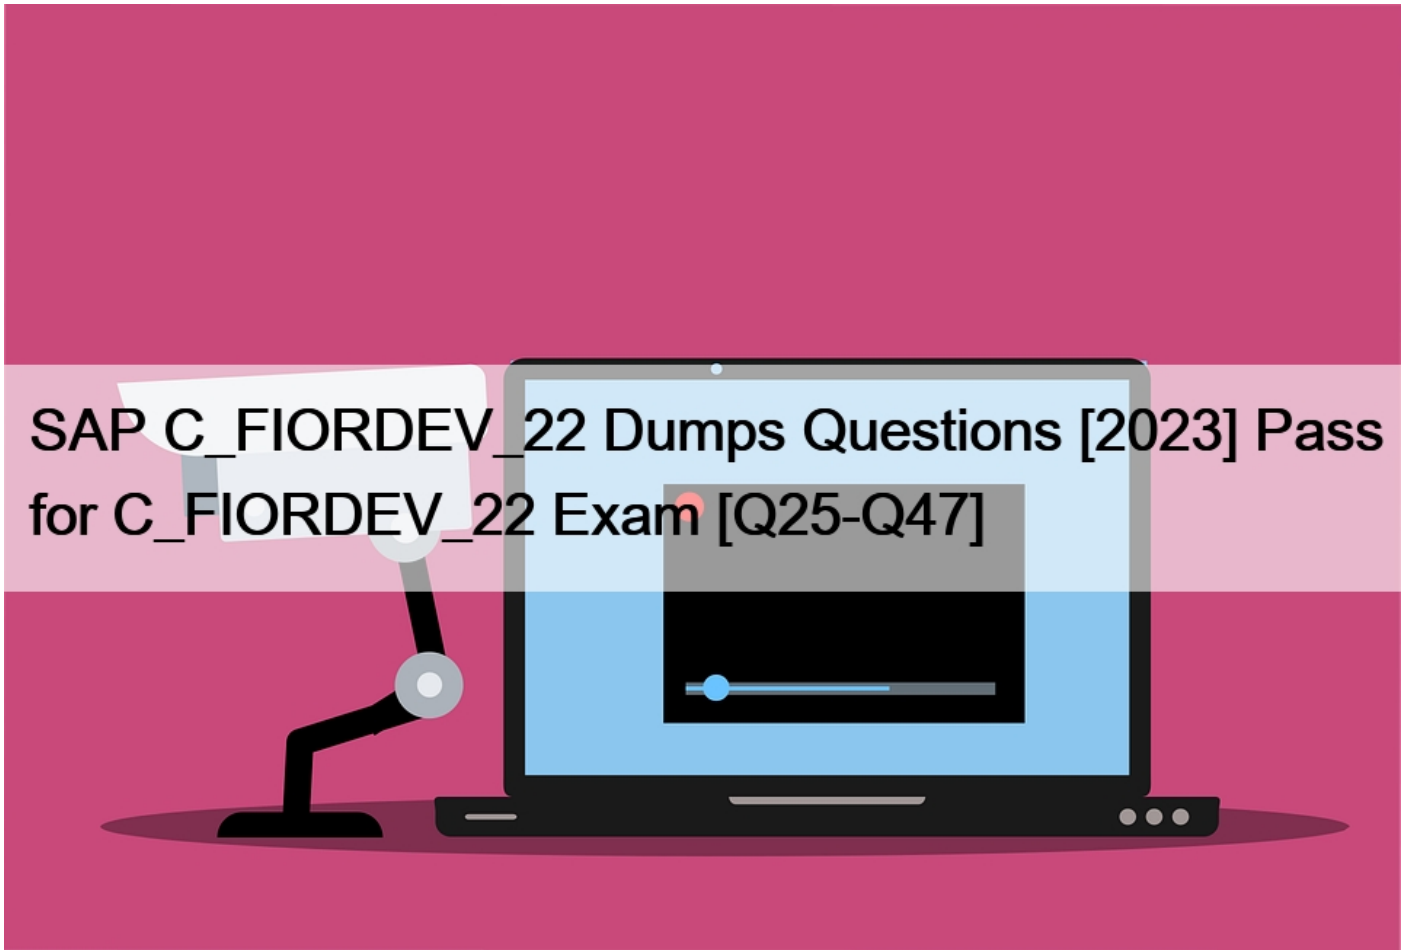

SAP C\_FIORDEV\_22 Dumps Questions [2023] Pass for C\_FIORDEV\_22 Exam  
Updated SAP Study Guide C\_FIORDEV\_22 Dumps Questions

### QUESTION 25

You develop an SAPUI5 app that updates data on the SAP back-end system. What activities are required when you implement an XSRF token? Note: There are 2 correct answers to this question.

- \* Retrieve the token and send it with each write request
- \* Execute the Refresh method for an expired token.
- \* Include the token in the HTTP request body of each write request
- \* Generate a token on each read and write request

### QUESTION 26

You extend an SAP Fiori app. The visibility value of a View Button control needs to be modified. Which extension point do you use?

- \* View Modification

- \* View Replacement
- \* View Extension
- \* View Visibility

### QUESTION 27

You need to securely connect the SAP BTP to an on-premise system. How does the SAP Cloud Connector help do this? Note: There are 2 correct Answers to this question.

- \* It supports custom destination API configuration and certificate inspection.
- \* It creates connectivity by a reverse-invoke process on the on-premise system
- \* It secures an SSL tunnel between the SAP BTP and the on-premise system.
- \* It initiates a cloud-based reverse-invoke process.

### QUESTION 28

In the code on the screenshot, what are the absolute paths of the property that retrieves the City value for the company Acme Inc.? Note: There are 2 correct Answers to this question.

```
1  var data = {
2      regions: [
3          {
4              name: "Americas",
5              companies : [
6                  {
7                      name : "Acme Inc.",
8                      city: "Belmont"
9                  },
10                 {
11                     name : "Beam Hdg.",
12                     city: "Hancock"
13                 }
14             ]
15         }
16     ]
17 };
18
19 var oModel = new sap.ui.model.json.JSONModel();
20 oModel.setData(data);
21 oModel.getProperty("<Absolute Path>")
```

- \* /region[0]/companies[0]/city
- \* /regions/companies/0/city
- \* /regions/0/companies/0/city
- \* /regions/1/companies/1/city

### QUESTION 29

What are the advantages of the Sinon.JS framework? Note: There are 2 correct Answers to this question.

- \* It enables test-driven development.
- \* It supports only synchronous requests.
- \* It supplies higher level test doubles for timers and AJAX requests.
- \* It is included in the SAP UI5 libraries.

### QUESTION 30

What are the limitations of OPA5 test?

Note: There are 2 correct answers to this question.

- \* It never causes a test to fail
- \* Testing across more than one page is NOT possible
- \* End-to-end tests are NOT recommended.
- \* The developer needs to create the test during development

### QUESTION 31

What are catalog types in SAP Fiori? Note: There are 3 correct Answers to this question.

- \* Tile
- \* Standard
- \* System
- \* Replicable
- \* None-typed

### QUESTION 32

You develop an SAPUI5 app that updates data for sales order and sales order items on the back-end system.

What do you create to implement a deep insert? Note: There are 2 correct answers to this question.

- \* A nested structure for Sales Order and Sales Order Items.
- \* A fat structure with Sales Order and Sales Order Items, and then add an expand command.
- \* An object structure that defines the hierarchy.
- \* An individual structures for both Sales Order and Sales Order Items, and then batch them.

### QUESTION 33

Which SAP Fiori app types require the SAP HANA database? Note: There are 2 correct answers to this question.

- \* Transactional
- \* Legacy
- \* Analytical
- \* Factshest

### QUESTION 34

Which HTTP request methods does the SAP Gateway server use to compute and return a new eTag in a response header? Note: There are 2 correct Answers to this question.

- \* PUT
- \* GET
- \* POST
- \* DELETE

### QUESTION 35

Which tile types can you use to display real-time data values that are read from an OData service? Note: There are 2 correct answers to this question.

- \* App Launcher &#8211; Dynamic tile

- \* App Launcher &#8211; Static tile
- \* News tile
- \* KPI-based tile

### QUESTION 36

You are modeling a new role for your SAP Fiori Launchpad users. Which of the following steps is an optional configuration step?

- \* Create Catalog
- \* Create Tiles and Target Mappings
- \* Create Group and Assign Tile
- \* Assign Catalog to Role

### QUESTION 37

What are the advantages of Local Annotations Over SADL-based Annotations? Note: There are 2 correct Answers to this question.

- \* Can handle Complex annotations which is not a bound to a single field or entity
- \* Can Override the CDS based Annotations
- \* Local Annotations are more reusable as compared to SADL based annotations
- \* All the Framework-Specific Annotations available as a part of CDS views are also available as a part of Annotation Modeler, which makes it highly flexible

### QUESTION 38

What are Technical Catalogs used for? Note: There are 2 correct Answers to this question.

- \* To reference tiles and target mappings according to Segregation of Duties for example a Purchaser, a Buyer and so on
- \* To store tiles and target mappings by technology per solution area
- \* As a reference for Business Groups
- \* As a reference for Business Catalogs

### QUESTION 39

Why does SAP Fiori use an intent-based navigation? Note: There are 2 correct Answers to this question.

- \* To support cross-app navigation
- \* The concrete app targets can be deployed separately
- \* Interdependent targets must be deployed in a single transport request
- \* To provide different results to different users with the same intent

### QUESTION 40

In the data in the screenshot, you want to display the List of Companies in the Americas region. Which binding option do you use for the X, Y, and Z values in the view?

```
1 View:
2 <List id="myList" items="{X}"
3   headerText="Companies" >
4   <DisplayListItem label="{Y}" value="{Z}" />
5 </List>
6
7 Data:
8 var data = {
9   regions: [
10    {
11     name: "Americas",
12     companies: [
13      {
14       name: "Acme Inc.",
15       city: "Belmont"
16      },
17      {
18       name: "Beam Hdg.",
19       city: "Hancock"
20      }
21     ]
22    }
23   ]
24 };
25
```

- \* X:/regions/0/companies Y: name Z: city
- \* X:/regions/companies Y: name Z: city
- \* X:/regions/0/companies Y: companies/O/name Z: companies/O/city
- \* X:/regions/companies Y: companies/name Z: companies/city

#### QUESTION 41

You develop an SAPUI5 app that updates data on the SAP back-end system. What activities are required when you implement an XSRF token? Note: There are 2 correct Answers to this question.

- \* Execute the Refresh method for an expired token.
- \* Generate a token on each read and write request.
- \* Retrieve the token and send it with each write request.
- \* Include the token in the HTTP request body of each write request.

#### QUESTION 42

Your customer requires an app to display flight information on a mobile device as detailed in the following screenshot for details. Which options can you use to display the same data in a readable format on a mobile device? Note: There are 2 correct answers to this question.

Flight No.	Date	To	Price	Airplane	
0017	2015-04-21 20:00:00 GMT-0400 (Universal Time Clock)	new york	SAN FRANCISCO	422.94	747-400
0017	Tue Apr 21 2015 20:00:00 GMT-0400 (Universal Time Clock)	new york	SAN FRANCISCO	422.94	747-400

- \* Column:<column demandpopin=&#8221;true&#8221; maxscreenwidth=&#8221;mobile&#8221;></column>
- \* Column:<column demandpopin=&#8221;true&#8221; maxscreenwidth=&#8221;mobile&#8221; popindisplay=&#8221;Inline&#8221;x/column>
- \* Column:<column demandpopin=&#8221;true&#8221; minscreenwidth=&#8221;tablet&#8221;x/column>
- \* Column:<column demandpopin=&#8221;true&#8221; minscreenwidth=&#8221;tablet&#8221; popindisplay=&#8221;Inline&#8221;x/column>

#### QUESTION 43

Which method on the SAP NetWeaver Gateway must you use to provide deep inserts?

- \* CREATE\_DEEP\_INSERT\_ENTITY
- \* CREATE\_INSERT\_ENTITY
- \* CREATE\_DEEP\_ENTITY
- \* CREATE\_INSERT\_DEEP\_ENTITY

#### QUESTION 44

In the source code below, which of the following locations must reference the extension point?

```
1 - <core:view xmlns:core="sap.ui.core" xmlns:form="sap.ui.core.mvc" xmlns="sap.m"
2 -   controllerName="appextension.EmployeeData" xmlns:html="http://www.w3.org/1999/xhtml">
3 -   <page title="Title">
4 -     <content>
5 -       <label text="First name:">
6 -       <input>
7 -       <core:extensionpoint name="doGetInfo">
8 -       <label text="Name:">
9 -       <input type="text" value="" name="doGetInfo">
10 -      <button text="Get Info" press="doGetInfo"></button>
11 -    </label>
12 -    </core:extensionpoint>
13 -  </label>
14 - </content>
15 - </page>
16 - </core:view>
```

- \* EmployeeData.controller.js
- \* EmployeeData.view.xml
- \* Component.js
- \* Neo-app.json

#### QUESTION 45

Your customer asks you to add text for a new language to an app. Which file do you send to the translator?

- \* 18n.properties
- \* Master.view.xml
- \* Manifest.json
- \* Component.js

#### QUESTION 46

Your customer requires that the SAPUI5 design of all apps matches their corporate theme. Which of the following actions do you perform? Note: There are 3 correct answers to this question.

- \* Create a theme using the Theme Designer implementing the theme.
- \* Create a model using the Web IDE implementing the theme
- \* Reference the relevant artifacts in the bootstrap of the app.
- \* Create a ess file using the Web IDE implementing the theme.
- \* Create a module using the Web IDE implementing the theme.

#### QUESTION 47

While testing an SAP Fiori app you discover that a button on the page delivers no response. Which of the following agile pyramid options do you use?

- \* Sinon
- \* QUnit
- \* OPA
- \* Mock server

**Achieve Success in Actual C\_FIORDEV\_22 Exam C\_FIORDEV\_22 Exam Dumps:**

[https://www.validexam.com/C\\_FIORDEV\\_22-latest-dumps.html](https://www.validexam.com/C_FIORDEV_22-latest-dumps.html)