


Actual 1z0-1042-22 Exam Recently Updated Questions with Free Demo [Q67-Q90]

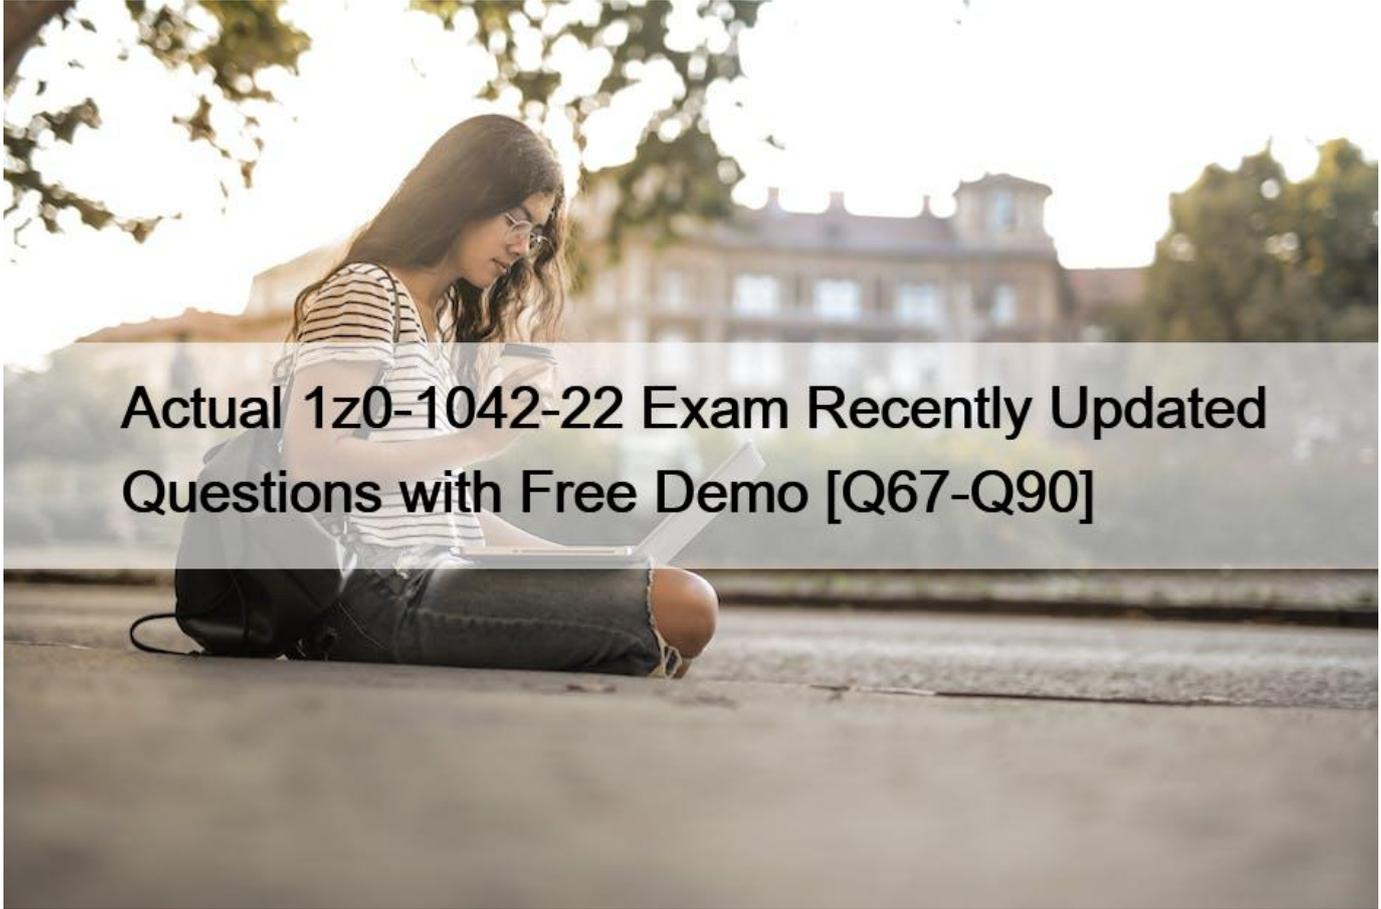

Actual 1z0-1042-22 Exam Recently Updated Questions with Free Demo
Free Oracle 1z0-1042-22 Exam Questions Self-Assess Preparation

Oracle 1z0-1042-22 is the certification exam for Oracle Cloud Platform Application Integration 2022 Professional. 1z0-1042-22 exam is designed for IT professionals who are responsible for integrating applications and services in the cloud environment. Passing this certification exam validates the skills and knowledge required to design, develop, deploy and manage cloud-based integrations using Oracle Cloud Platform.

NO.67 Which two are NOT default start and end events in Process Cloud Service?

- * Folder start and None end event
- * SOAP start and SOAP end event
- * None start and end event
- * Task start and end event

Explanation

<https://docs.oracle.com/en/cloud/paas/process-cloud/user/defining-process-start-and-end.html#GUID-E3E20D7C>

NO.68 Which schema is used for defining the field structure of an analytic object?

- * Apache Avro schema
- * XSD schema
- * Database schema
- * XSL Schema

Using Schemas to Define the Fields of Analytics Objects

You can import an Apache Avro schema file to define the field structure of your analytics object.

To import a schema file, your analytics object must not have any fields defined.

The namespace and object name in your schema file must match the name of the analytics object that you created.

After you create your analytics object, click Import Schema.

The file browser dialog box appears.

Select a valid Avro schema file from your computer and click Open.

For more information about Avro schemas, see Apache Avro.

The field structure defined in the schema file appears in the Fields section.

Click Save.

The field structure defined in your Avro schema file is imported to your analytics object.

<https://docs.oracle.com/en/cloud/paas/iot-cloud/iotgs/using-schemas-define-fields-analytics-objects.html>

NO.69 In Oracle Integration Cloud (OIC) Process, you can configure a human task that enable you to model approval task interactions.

What are the available options when configuring the Escalation and Expiration tab of human task?

- * Expire, Reset, Escalate
- * Expire, Escalate, Skip, Reset
- * Never Expire, Expire, Renew, Escalate
- * Never Expire, Expire, Never Escalate, Escalate

NO.70 Which is NOT an activity that an Application Developer (API Consumer) can perform in the Developer Portal in Integration API Platform Cloud Service?

- * Learn about APIs
- * Subscribe to a plan
- * Create an API
- * Test an API
- * Create Application
- * Monitor performance

<https://docs.oracle.com/en/cloud/paas/api-platform-cloud/apfdv/typical-workflow-consuming-apis.html#GUID-0AC9919A-A1B6-49D5-B2B1-6E6CD227805A>

NO.71 Which two options cannot be performed from the Monitoring Dashboard?

- * Activity Stream Download
- * Artifacts Download
- * Download Incident Logs
- * Download Lookup
- * Download Diagnostic Logs

NO.72 You have use case requiring the design of a synchronous OIC integration flow that will return a custom business fault message to the client if processing files due to an external runtime fault encountered during the integration instance execution

- * Implement a scope fault handler to catch the runtime fault, and then use the Fault Return action providing mapped data for the custom fault.
- * Implement the Global fault handler to catch the runtime fault, and then use the Re-Throw fault action to send the custom fault to the client
- * Create a custom scope fault handler to catch the runtime fault, and then use the Re-Throw fault action to send the fault to the error hospital
- * Implement a scope fault handler to catch the runtime fault, then allow the Global fault handler to automatically send the runtime fault to the error hospital

NO.73 What Mapper function can you use to get the lookup value in Mapping Builder?

- * GetLookupValue
- * FindLookupValue
- * LookupValue
- * SearchLookupValue

NO.74 Which two are NOT start and end event options when creating structured process in an OIC Process application?

- * Message Start event and None end event
- * None start event and None end event
- * SOAP start event and None end event
- * Form start event and None end event
- * Task start event and Task end event

<https://docs.oracle.com/en/cloud/paas/integration-cloud/user-processes/structured-processes.html#GUID-2080743F-61AA-4D41-B5BA-B80E2F8F903A>

NO.75 What are two key benefits of Oracle Web Service Manager (OWSM) in the management and security of Web services across the organization?

- * Security is controlled by the developer of the service and this gives greater control to the development of the service.
- * OAuth services are used for REST based services.
- * OWSM provide a framework that is externalized and declarative outside of the web service implementation.
- * Developers no longer need to understand security specifications and security implementation details.

<https://docs.oracle.com/middleware/1212/owsm/OWSMC/owsm-intro.htm#OWSMC110>

NO.76 Which statement is NOT true about decision models in OIC process?

- * In the Graph view, you can create decision requirement diagrams(DRDs) to visually represent your decision model but only one DRD per decision model is supported.
- * Decisions created using the Function notation return a value only when invoked from another decision.
- * A decision service exposes output decisions of a decision model as private internal REST APIs to the process application.
- * A decision model must contain atleast one decision service in order to be used in Process application.

NO.77 Which two statements are true about Internet of Things (IoT)?

- * Different IOT approaches need to be established integrate different technologies such as mobile, cloud, big data, and analytics, and connects everyday objects to each other and to the Internet.
- * Cloud technology is well suited to enable IoT, offering high degrees of agility, low and flexible costs, and excellent resource utilization.
- * Using IoT, hospitality-based businesses can better track customer behavior and preferences to deliver rewards and more tailored services that differentiate their businesses.
- * IOT is not useful in asset tracking scenarios because there is an unavailability of low-cost connected devices and sensors that can be embedded into all of the various assets that need tracking.

Explanation

<https://www.oracle.com/assets/oracle-iot-solution-brief-2632911-es.pdf>

NO.78 Which two statements correctly define the use cases for Business Process Execution Language(BPEL) vs.

Business Process Modeling Notation (BPMN) vs. Enterprise Service Bus (ESB)?

- * Decision Model and Notation (DMN) replaces BPMN in modern Cloud Architectures.
- * All are part of a typical/traditional on-premise enterprise integration strategy and can also be an important part of a hybrid on-premises/Cloud architecture.
- * BPEL is inherently better than BPMN in managing orchestrations that involve people, because BPEL can also interact with systems.
- * An ESB is used primarily for stateless messages and service mediation. The ESB construct is being replaced by API Gateways and API Gateways in modern Cloud architectures.
- * BPEL and ESB are both good technologies for doing heavy transformations of data before sending the data to a back-end system or database.

NO.79 You are designing a new integration in OIC that needs to expose a REST-full interface trigger for client applications.

When choosing request and response options using the REST Adapter Endpoint Configuration Wizard, which is a valid consideration?

- * Both standard and custom HTTP headers can be defined for either the request or response.
- * File attachments can be accepted as a request option for the Trigger interface, but you cannot include attachments as a response to the client.
- * If you select a PUT or POST action (HTTP method), you must define a JSON response payload format.
- * Although you can define both query and template parameters, only template parameters will be available for mapping in the mapper because query parameters are considered optional.

NO.80 Which two statements are true about Decision Snapshots?

- * These snapshots, once activated, cannot be used independently in multiple applications.
- * You cannot delete the decision model snapshot that has already been activated.
- * Decision snapshots are read-only copies of a decision model.
- * Decision model can be activated on DMN server.

<https://docs.oracle.com/en/cloud/paas/integration-cloud/user-processes/manage-decision-model-snapshots.html>

NO.81 You are tasked with creating a new integration in OIC that will be exposed to clients as a SOAP web service. In addition, this integration will be invoking an external SOAP web service as part of the orchestration flow logic.

In your creation of these SOAP adapter connection components, which is a valid consideration?

- * You must explicitly specify the target server TLS version for the external web service outbound Invoke connection configuration.
- * The WSDL URL property value can be defined by uploading a file for either the inbound Trigger connection or the outbound Invoke connection configurations.

* The SAML and OAuth security policies are available options for creating either the inbound Trigger connection or the outbound Invoke connection configurations.

* Suppress insertion of timestamp into the request and Ignore timestamp in the response message are optional fields only for the outbound Invoke connection configuration.

<https://docs.oracle.com/en/cloud/paas/integration-cloud/soap-adapter/create-connection.html>

NO.82 Which three are valid Oracle Integration Cloud (OIC) Roles ?

* ServiceDeployer

* ServiceImplementor

* ServiceUser

* ServiceAdministrator

Oracle Integration Cloud Roles Oracle Integration Cloud predefined roles govern access to various Oracle Integration Cloud features: Integrations, Processes, Visual Builder, Integration Insight, and Stream Analytics . Oracle Integration Cloud predefined roles include ServiceAdministrator, ServiceDeveloper, ServiceMonitor, ServiceDeployer, and ServiceUser.

<https://docs.oracle.com/en/cloud/paas/integration-cloud-um/integration-cloud-user-um/administering-oracle-integration-cloud.pdf>

NO.83 What options are available for Escalation and Expiration of human tasks in Process Cloud Service?

* Escalate, Restart, Next or Previous

* Renew, start, end, or error

* Never Escalate, Skip, hierarchy, or New

* Never expire, Expire, Renew, or Escalate

Configuring Task Expiration, Renewal, or Escalation

You can configure a human task to never expire, to expire after a certain time, to renew the expiration time, or to escalate after a certain time passes.

To configure an action to perform on a specific deadline:

Click the Escalation and Expiration tab on the implementation pane.

The Escalation and Expiration tab appears.

Use the radio buttons to specify if you want the human task to Never expire, Expire, Renew, or Escalate.

Never expire: the human task doesn't expire and if no user completes it, it remains in the users task list for an indeterminate period of time.

Expire: the human task expires after the specified time and is no longer accessible from the task list.

Renew: when the specified time passes, the expiration date is extended for one more period until it reaches the specified amount of renewals allowed.

Escalate: when the specified time passes, the human task is escalated to the specified escalation levels.

<https://docs.oracle.com/en/cloud/paas/process-cloud/user/configuring-human-tasks.html#GUID-3869867C-45A3-48E4-9DFB-EE9980B2C2B0>

NO.84 Which two statements are true regarding mapper activity?

* You can drag and drop a source on to multiple targets

- * You can drag and drops switcher activity in the target
- * You cannot drag and drop a source on to a target that is already mapped
- * You can drag and drop function activity in the target

NO.85 What are the three main capabilities of Oracle Integration Cloud (OIC)?

- * Application integration
- * API management
- * Business process automation
- * Internet of Things (IoT) application development
- * Web and mobile application development
- * Digital assistant application development
- * Blockchain application development

NO.86 Which operation is NOT supported by Stage activity?

- * Read Entire File
- * Delete File
- * Write File
- * Unzip File
- * Zip File
- * Read File in Segments

NO.87 Which statement is valid regarding Connection components in OIC Service?

- * All Connection components must be associated with an adapter type regardless of role configuration.
- * Each Connection component associated with a SaaS adapter type will also require a Lookup Component configuration.
- * Connection components can be configured with either a Trigger role or Invoke role, but not both.
- * All connection component configurations require the association of an active OIC Connectivity agent group.

NO.88 In Oracle Integration Cloud (OIC) Process, you create web forms to interact with end users. As part of creating a web form, you add its controls, configure its data, and define form behavior Which statement is true about creating web forms?

- * You can assign only one style sheet and one or more presentations to a web form
- * You can assign one or more stylesheets and only one presentation to a webform
- * You can assign one or more stylesheets and one or more presentations to a webform
- * You can assign only one style sheet and only one presentations to a web form

<https://docs.oracle.com/en/cloud/paas/integration-cloud/user-processes/ready-create-web-form.html#GUID-F758085B-2F12-44BD-9E6C-47C6FD99A820>

NO.89 What is the “Decision Table” in Business Rules in Process Cloud Service?

- * a range value set in a spreadsheet-like format that defines a list of allowed value ranges for the input and output data objects of a decision
- * a decision matrix that organizes if/then rules into a spreadsheet-like format, where rows represent conditions and actions, and columns match condition values to action alternatives
- * an if/then rule that has one or more conditions (if statements) that together are true or false, and one or more actions (then statements) that are applied if the conditions are true
- * a value set in a spreadsheet-like format that defines a list of allowed values for the input and output data objects of a decision

NO.90 Which APIs does Oracle Internet of Things (IoT) Cloud Service use to perform an analysis?

- * Native Spark Java APIs
- * SQL Queries
- * JavaScript APIs
- * Big Data APIs

Oracle IoT Cloud Service uses native Spark Java APIs to perform the analysis. Developers can use the Batch and Streaming spark APIs to write the analytics processing logic.

Developers can also import external APIs and use them in their application.

<https://docs.oracle.com/en/cloud/paas/iot-cloud/iotgs/analytics-oracle-iot-cloud-service.html>

Oracle 1z0-1042-22 exam consists of 60 multiple-choice questions, and you have 105 minutes to complete the exam. 1z0-1042-22 exam is available in multiple languages, including English, Japanese, and Simplified Chinese.

1z0-1042-22 Free Sample Questions to Practice One Year Update: <https://www.validexam.com/1z0-1042-22-latest-dumps.html>